




Fan & Blowers

Motorized Impellers and Centrifugal Blowers

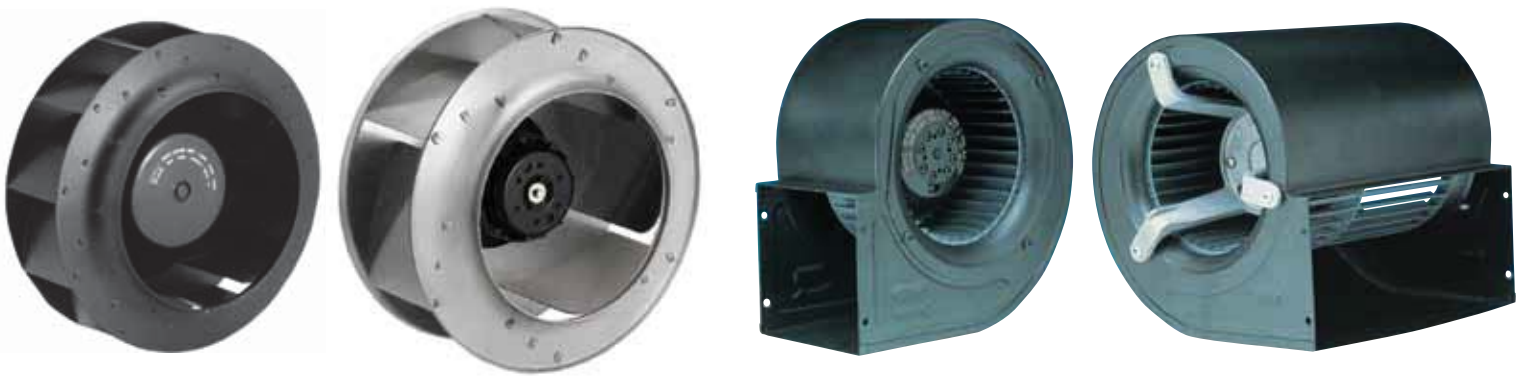

Backward & Forward Curved • 2 & 4 Pole Motors • Single & Dual Inlet



HVAC Air Movers Designed for Hard Work and Long Service

MOTOR DESIGN CONSIDERATIONS

To assure optimum performance of an air moving device, proper and careful motor design is critical. Soler & Palau's (S&P) state-of-the-art proprietary engineering and manufacturing programs produce external rotor motors that overcome inertia, achieve the specified operation speed, and operate at that speed without excessive power consumption or heat generation.

S&P fans and motors are dynamically balanced in two planes in accordance with the VDI 2060 standard. Ball bearings, with protective metal rings on both sides, are used to provide maintenance free operation with an average life of 40,000 hours. These motors can be operated with the shaft aligned with either the vertical or horizontal axis. All motors are manufactured with UL Class B insulation. UL Class F can be supplied upon request. A bimetallic self-resetting thermal protection design that prevents damage caused by a short circuit of the capacitor, locked rotor or over voltage is standard. These motors are designed to meet UL, CSA, VDE and TUV standards; many models are currently approved.

S&P motors can be speed controlled through the use of fixed or variable resistances, auto-transformers or electronic controllers. For specific applications, special motors can be supplied with 3-speed step windings. All fans and motors feature an IP44 rating for protection against dust and water. For special applications motors with IP20 or IP00 are also available. All S&P products are manufactured in modern ISO 9002 certified facilities.

QUIET, LOW PROFILE, HIGH PERFORMANCE



Soler & Palau's motorized impellers and centrifugal blowers are designed for installation in compact spaces and feature airflow over the motor for excellent heat dissipation and extended reliability. This one-piece assembly eliminates rotational vibration problems experienced with traditional blowers, where the impeller is mechanically affixed to the shaft with a hub and set screw. These innovative products are available in 115VAC or

230VAC and operate at 50HZ or 60HZ.

Typical uses include a variety of HVAC venting, exhausting and filtering applications where long hours and harsh conditions are usually found. Ultra-quiet and ultra-efficient, these units are the newest addition to an extensive product line of air moving devices designed and manufactured by S&P; a global pioneer in motor, fan, blower and ventilation technology.



TYPICAL APPLICATIONS

Exhausting Industrial Processes • Roof and Building Ventilation • Radon Evacuation • Cleanroom and Other Sensitive HEPA Filtering Applications • Laboratory and Research Facility Ventilation • Air Conditioners, Heat Exchangers • In-Line Duct Blowers • Range Hoods, Fire Place Inserts • Humidifiers/Dehumidifiers • Hand Dryers

Backward Curved Motorized Impellers



DESCRIPTION

S&P Backward Curved Motorized Impellers offer a quiet and compact air moving solution. The Permanent Split Capacitor (PSC) motors provide reduced operating costs and longer service life. Ball bearing construction allows multiple mounting options. Motorized Impellers have low profiles that do not require a housing. Air is discharged 360° radially from the impeller wheel. These units operate very efficiently at high pressures.

Backward Curved Motorized Impellers



DESCRIPTION

S&P Backward Curved Motorized Impellers offer a quiet and compact air moving solution. The Permanent Split Capacitor (PSC) motors provide reduced operating costs and longer service life. Ball bearing construction allows multiple mounting options. Motorized Impellers have low profiles that do not require a housing. Air is discharged 360° radially from the impeller wheel. These units operate very efficiently at high pressures.

Product Features

- Sealed Ball Bearings
- 20" (500 mm) Standard Lead Length
- Clockwise Rotation Viewing Inlet
- UL and cUL listed for Electrical Safety
- All models have been independently tested for safety by Underwriters Laboratories, Inc.
- All models are fitted with an internal Thermal Overload Protection Device.

Motor Options


- 2 Pole Motors
- 4 Pole Motors




Optional Accessories

Inlet Rings

Ø Impeller	A		B		C		D		E	
	in	mm	in	mm	in	mm	in	mm	in	mm
133	5.07	129	4.64	118	3.3	84	0.51	13	0.27	7
175	6.69	170	6.22	158	4.92	125	0.55	14	0.39	10
180 / 190	6.69	170	6.22	158	4.92	125	0.55	14	0.39	10
220	9.92	252	9.64	245	5.98	152	0.78	20	0.78	22
225	8.78	223	8.26	210	5.74	146	1.1	28	0.98	25
250	10	255	9.44	240	6.45	164	1.22	31	1.1	28
280	11	280	10.2	260	7.2	183	1.37	35	1.22	31

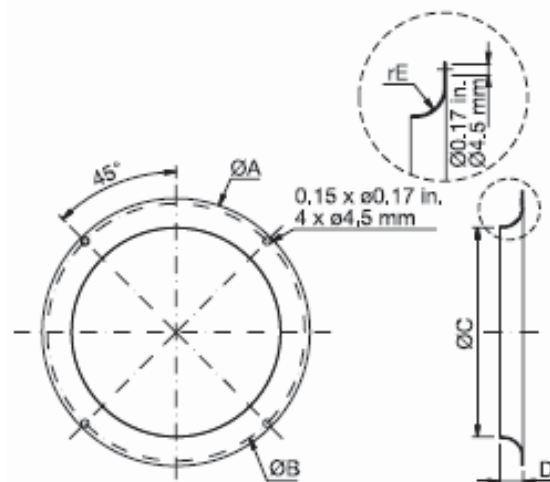

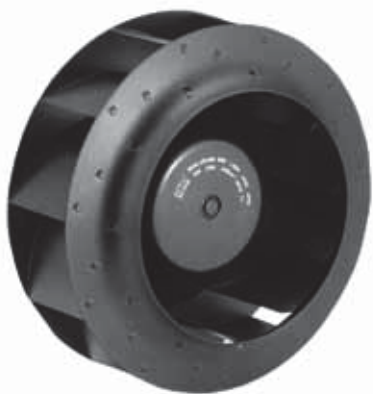


Backward Curved Motorized Impellers

2 Pole Motors

Product Features

- Sealed Ball Bearings
- 20" (500 mm) Standard Lead Length
- Clockwise Rotation Viewing Inlet
- UL and cUL listed for Electrical Safety
- All models have been independently tested for safety by Underwriters Laboratories, Inc.
- All models are fitted with an internal Thermal Overload Protection Device.

Dimensions

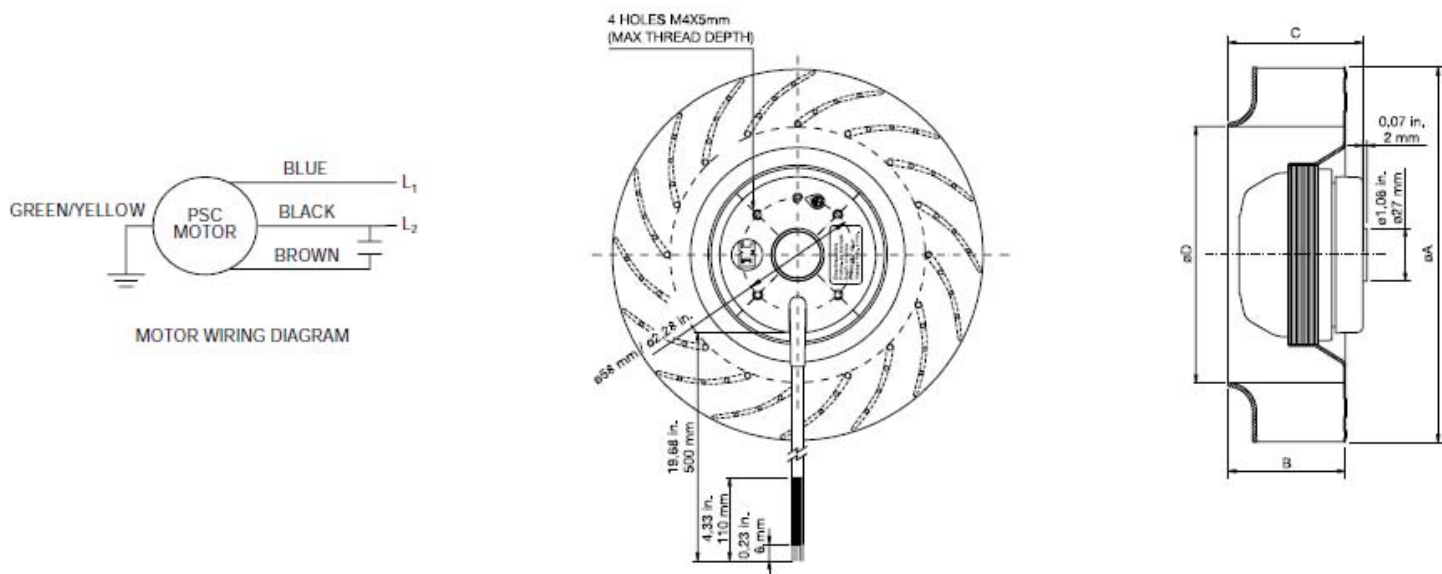

MODEL	A		B		C		D	
	in.	mm	in.	mm	in.	mm	in.	mm
2B508-115TEG	5.24	133	2.36	60	3.35	85	3.54	90
2B508-230TEG	5.24	133	2.36	60	3.35	85	3.54	90
2B628-115TEG	6.89	175	1.85	47	2.28	58	5.15	131
2B628-230TEG	6.89	175	1.85	47	2.28	58	5.15	131
2B630-115TEG	7.08	180	2.04	52	2.76	70	4.76	121
2B630-230TEG	7.08	180	2.04	52	2.76	70	4.76	121
2B716-115TEG	7.48	190	2.36	60	2.67	68	5.15	131
2B716-230TEG	7.48	190	2.36	60	2.67	68	5.15	131
2B824-115TEG	8.66	220	2.48	63	2.8	71	6.26	159
2B824-230TEG	8.66	220	2.48	63	2.8	71	6.26	159
2B827-115TEG	8.86	225	2.44	62	2.83	72	6.06	154
2B827-230TEG	8.86	225	2.44	62	2.83	72	6.06	154
2B828-115TEG	8.86	225	3.48	88	3.86	99	6.06	154
2B828-230TEG	8.86	225	3.48	88	3.86	99	6.06	154
2B928-115TEG	9.84	250	3.3	84	3.89	99	6.85	174
2B928-230TEG	9.84	250	3.3	84	3.89	99	6.85	174

Backward Curved Motorized Impellers

2 Pole Motors


Technical Data


MODEL	N°	V	Hz	CFM	W	RPM	dBA	μF	Impeller Material
2B508-115TEG	1	115	60	150	30	3400	63	3	Metallic
2B508-230TEG	1	230	60	150	30	3400	63	1	Metallic
2B628-115TEG	2	115	60	270	65	2600	68	8	Metallic
2B628-230TEG	2	230	60	270	65	2600	68	2	Metallic
2B630-115TEG	3	115	60	250	100	2250	60	6	Metallic
2B630-230TEG	3	230	60	250	100	2250	60	2	Metallic
2B716-115TEG	4	115	60	370	90	2600	65	5	Met-Plas
2B716-230TEG	4	230	60	370	90	2600	65	2	Met-Plas
2B824-115TEG	5	115	60	560	115	3050	75	8	Met-Plas
2B824-230TEG	5	230	60	560	115	3050	75	2	Met-Plas
2B827-115TEG	6	115	60	588	160	3250	73	15	Metallic
2B827-230TEG	6	230	60	588	160	3250	73	4	Metallic
2B828-115TEG	7	115	60	735	200	2775	70	18	Metallic
2B828-230TEG	7	230	60	735	200	2775	70	5	Metallic
2B928-115TEG	8	115	60	912	215	2600	75	20	Metallic
2B928-230TEG	8	230	60	912	215	2600	75	5	Metallic

All data taken @ 0.00 S.P. with inlet ring at 60 Hz (name plate rating may vary from data).



Technical Curves

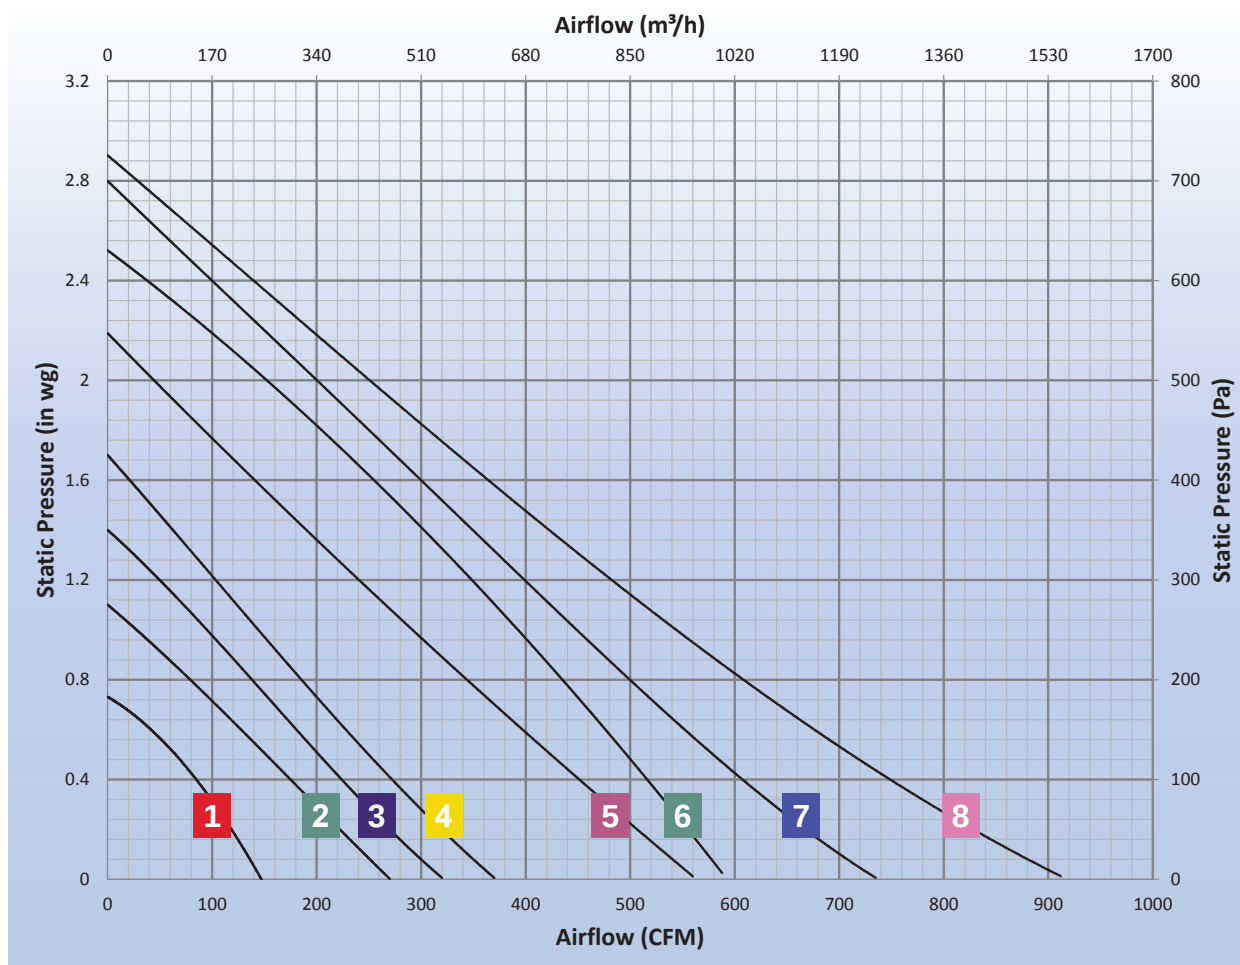

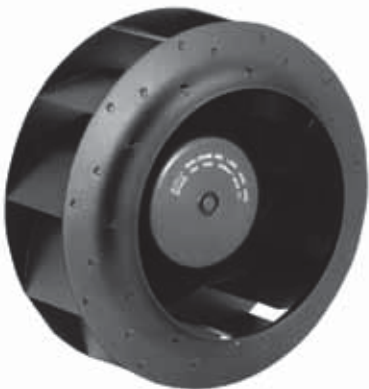




Backward Curved Motorized Impellers

4 Pole Motors

Product Features

- Sealed Ball Bearings
- 20" (500 mm) Standard Lead Length
- Clockwise Rotation Viewing Inlet
- UL and cUL listed for Electrical Safety
- All models have been independently tested for safety by Underwriters Laboratories, Inc.
- All models are fitted with an internal Thermal Overload Protection Device.

Dimensions

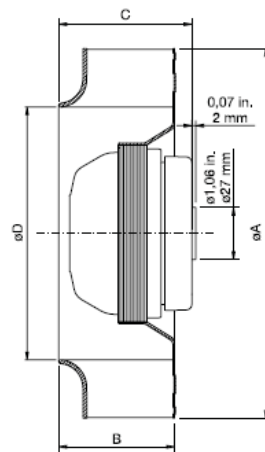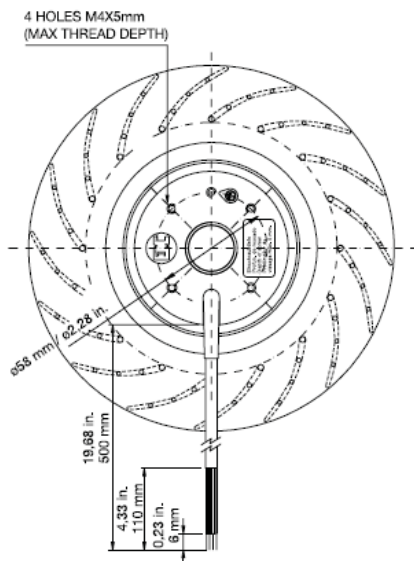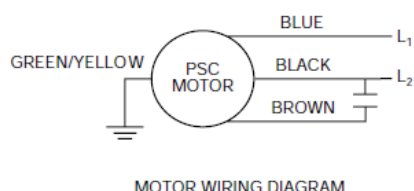

MODEL	A		B		C		D	
	in.	mm	in.	mm	in.	mm	in.	mm
4B630-115TEG	7.08	180	2.04	52	2.76	70	4.76	121
4B630-230TEG	7.08	180	2.04	52	2.76	70	4.76	121
4B716-115TEG	7.48	190	2.36	60	2.67	68	5.15	131
4B716-230TEG	7.48	190	2.36	60	2.67	68	5.15	131
4B827-115TEG	8.86	225	2.44	62	2.76	70	6.06	154
4B827-230TEG	8.86	225	2.44	62	2.76	70	6.06	154
4B828-115TEG	8.86	225	3.46	88	3.89	99	6.06	154
4B828-230TEG	8.86	225	3.46	88	3.89	99	6.06	154
4B928-115TEG	9.84	250	3.3	84	3.89	99	6.85	174
4B928-230TEG	9.84	250	3.3	84	3.89	99	6.85	174
4B1100-115TEG	11.02	280	4.17	106	4.8	122	7.52	191
4B1100-230TEG	11.02	280	4.17	106	4.8	122	7.52	191

Backward Curved Motorized Impellers

4 Pole Motors


Technical Data

MODEL	N°	V	Hz	CFM	W	RPM	dBA	μF	Impeller Material
4B630-115TEG	1	115	60	191	35	1550	54	3	Metallic
4B630-230TEG	1	230	60	191	43	1550	54	0.8	Metallic
4B716-115TEG	2	115	60	225	32	1675	52	3	Metallic
4B716-230TEG	2	230	60	225	32	1675	52	1	Metallic
4B827-115TEG	3	115	60	288	30	1650	55	3	Metallic
4B827-230TEG	3	230	60	288	30	1650	55	1	Metallic
4B828-115TEG	4	115	60	432	42	1650	59	5	Met-Plas
4B828-230TEG	4	230	60	432	42	1650	59	1	Met-Plas
4B928-115TEG	5	115	60	530	50	1575	63	5	Met-Plas
4B928-230TEG	5	230	60	530	58	1575	63	1	Met-Plas
4B1100-115TEG	6	115	60	940	105	1650	66	10	Metallic
4B1100-230TEG	6	230	60	940	105	1650	66	2.5	Metallic

All data taken @ 0.00 S.P. with inlet ring at 60 Hz (name plate rating may vary from data).



Technical Curves

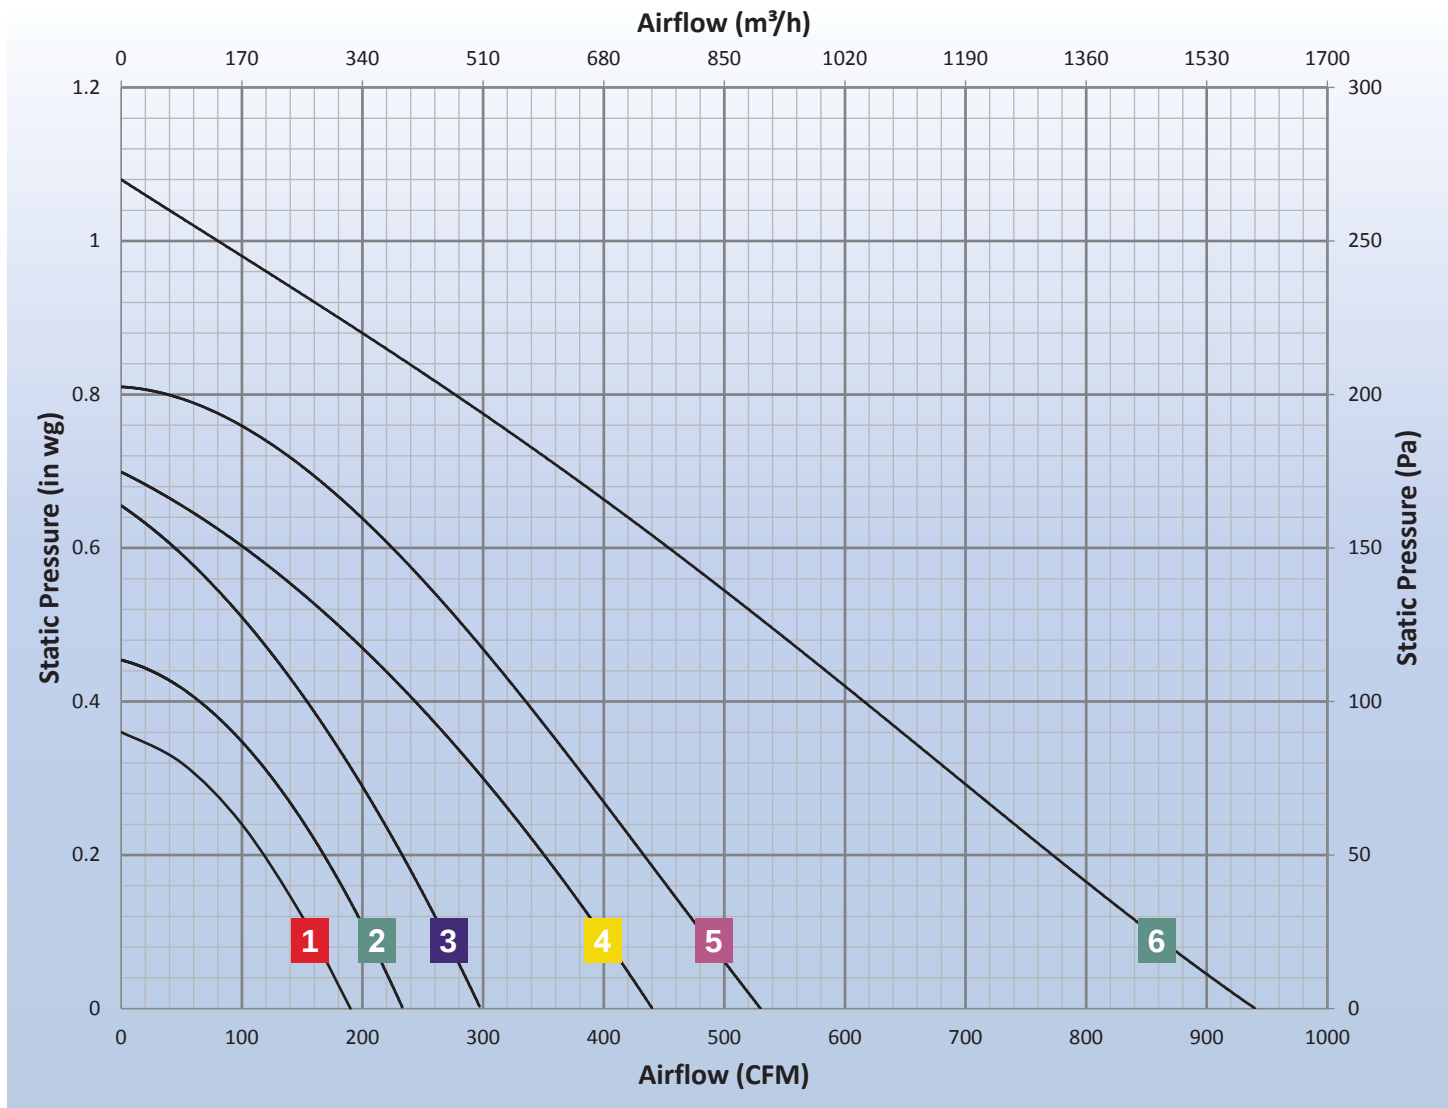

Backward Curved Motorized Impellers




4 Pole Motors



Product Features

- Sealed Ball Bearings
- 20" (500 mm) Standard Lead Length
- Clockwise Rotation Viewing Inlet
- UL and cUL listed for Electrical Safety
- All models have been independently tested for safety by Underwriters Laboratories, Inc.
- All models are fitted with an internal Thermal Overload Protection Device.

Dimensions

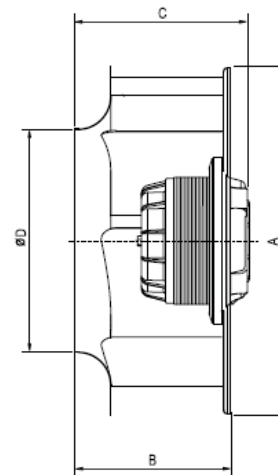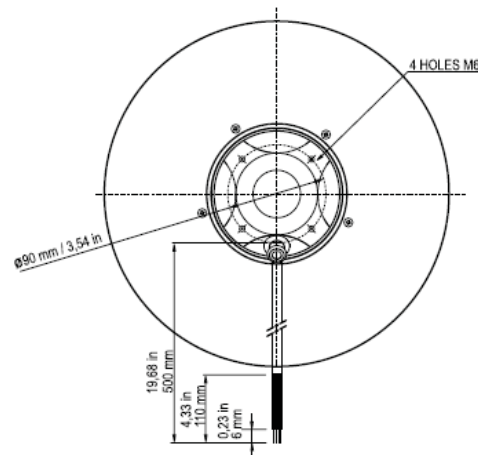

MODEL	A		B		C		D	
	in.	mm	in.	mm	in.	mm	in.	mm
RB4C-315/145 K919 I	12.6	320	5.6	142	6.22	158	8.03	204
RB4C-315/145 K937 I	12.6	320	5.6	142	6.22	158	8.03	204
RB4C-355/170 K930 I	14.2	360	6.7	170	7.32	186	9.29	236
RB4C-355/170 K938 I	14.2	360	6.7	170	7.32	186	9.29	236

Backward Curved Motorized Impellers

4 Pole Motors


Technical Data

MODEL	N°	V	Hz	CFM	W	RPM	dBA	μF	Impeller Material
RB4C-315/145 K919 I	1	115	60	1112	220	1600	64	12	Metallic
RB4C-315/145 K937 I	1	230	60	1112	195	1600	64	3	Metallic
RB4C-355/170 K930 I	2	115	60	1930	320	1640	70	25	Metallic
RB4C-355/170 K938 I	2	230	60	1930	320	1640	70	8	Metallic

All data taken @ 0.00 S.P. with inlet ring at 60 Hz (name plate rating may vary from data).



Technical Curves

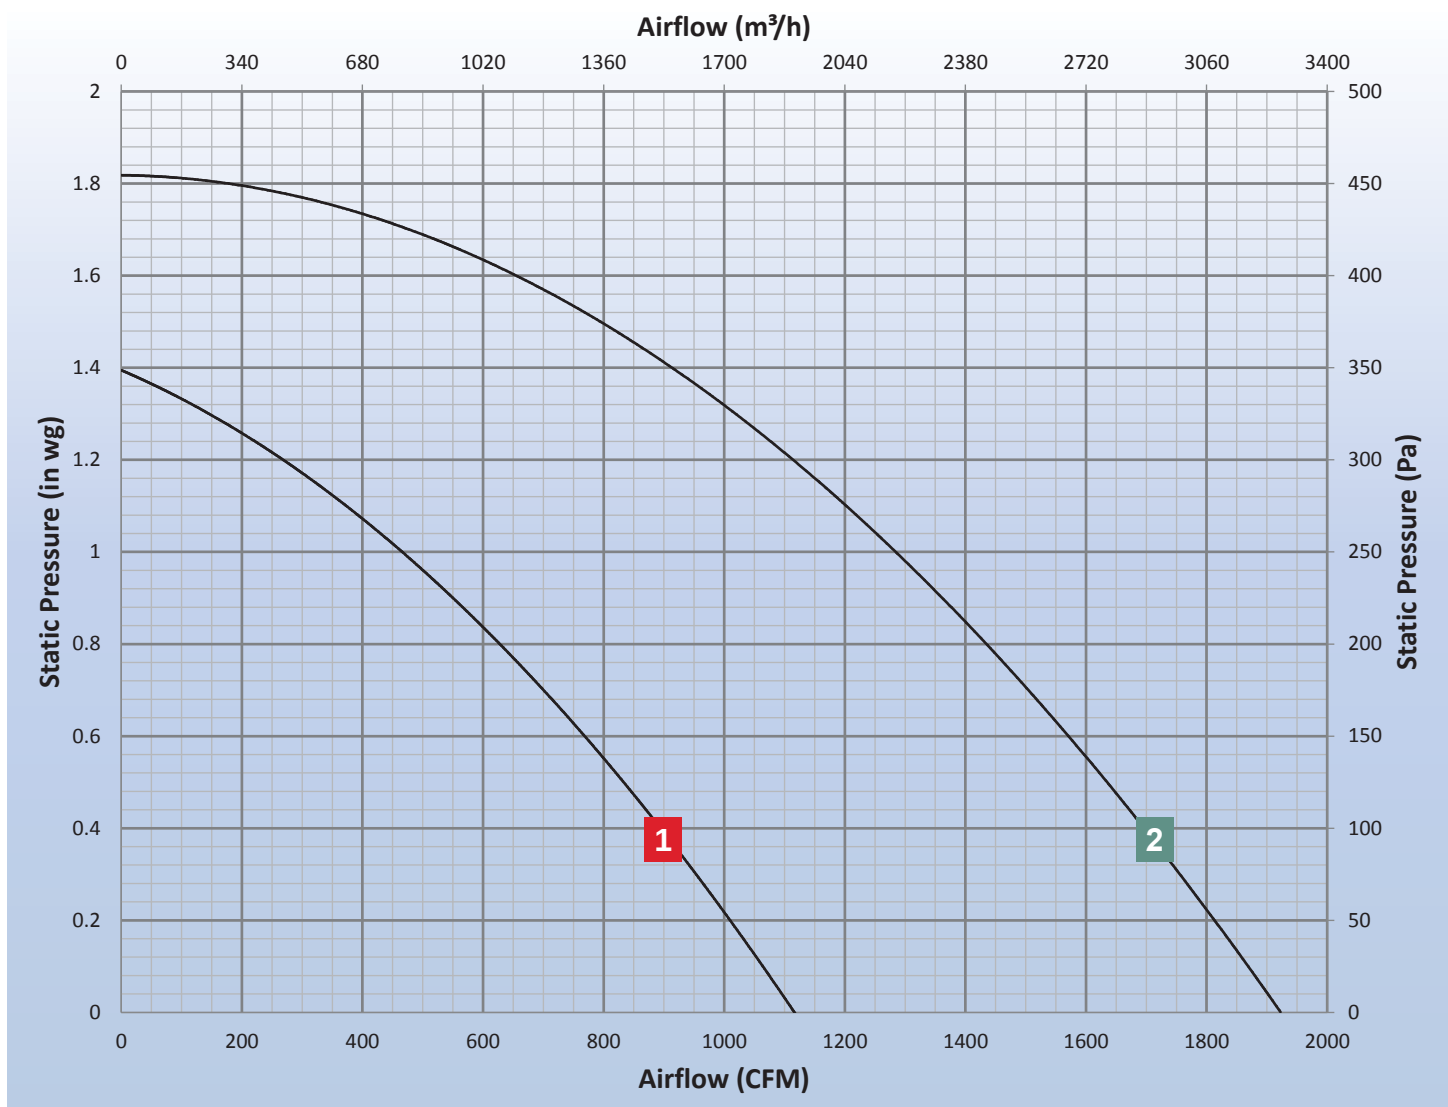



S&P México

Blvd. A 15 Parque Industrial
Puebla 2000 Puebla, Pue.
México C.P. 72310

Tel. (222) 2 233 911, 2 233 900

www.solerpalau.mx

ISO 9001: 2015

S&P México se reserva el derecho de modificación sin previo aviso.

Soler&Palau 
Ventilation Group